


Manual Extendable Forks - Specifications

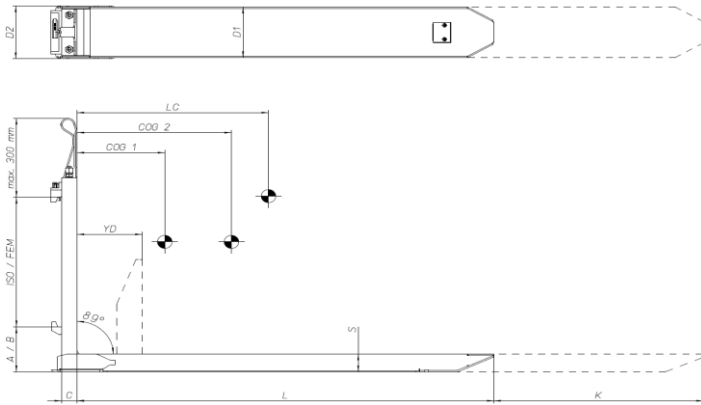

Metric

Model	Capacity per pair kg on LC 600 mm	Retracted length mm	Extended length mm	Lost load Thickness mm	Section outer mm	CoG1 mm	CoG2 mm	Mass per pair kg	ISO class FEM
MME 17 0800/0400	1700	0800	1200	40	130x41	220	245	95	2A
MME 17 0800/0200	1700	0800	1000	40	130x41	220	245	95	2A
MME 17 1000/0200	1700	1000	1200	40	130x41	295	315	110	2A
MME 17 1200/0800	1700	1200	2000	40	130x41	380	500	121	2A
MME 20 0800/0400	2000	0800	1200	45	133x58	235	295	114	2A
MME 20 0800/0200	2000	0800	1000	45	133x58	235	295	114	2A
MME 20 1000/0200	2000	1000	1200	45	133x58	315	415	131	2A
MME 20 1200/0800	2000	1200	2000	45	133x58	405	545	150	2A
MME 20 1400/1000	2000	1400	2400	45	133x58	484	640	161	2A
MME 24 0800/0200	2400	0800	1000	45	132x45	220	275	104	2A
MME 24 0800/0400	2400	0800	1200	45	132x45	220	275	104	2A
MME 24 1000/0200	2400	1000	1200	45	132x45	300	325	121	2A
MME 24 1200/0800	2400	1200	2000	45	132x45	385	515	135	2A
MME 30 0800/0200	3000	0800	1000	45	133x58	220	275	122	3A
MME 30 0800/0400	3000	0800	1200	45	133x58	220	275	122	3A
MME 30 1000/0200	3000	1000	1200	45	133x58	300	325	144	3A
MME 30 1200/0800	3000	1200	2000	45	133x58	390	515	158	3A
MME 30 1400/1000	3000	1400	2400	45	133x58	470	645	176	3A
MME 35 0800/0200	3500	0800	1000	50	133x63	230	300	140	3A
MME 35 0800/0400	3500	0800	1200	50	133x63	230	300	140	3A
MME 35 1000/0200	3500	1000	1200	50	133x63	320	390	160	3A
MME 35 1200/0800	3500	1200	2000	50	133x63	400	550	183	3A
MME 35 1400/1000	3500	1400	2400	50	133x63	485	680	205	3A

Imperial

Model	Capacity per pair lbs on LC 24"	Retracted length inch	Extended length inch	Lost load Thickness inch	Section outer inch	CoG1 inch	CoG2 inch	Mass per pair lbs	ISO class FEM
MME 17 0800/0400	3740	31.5"	47.2"	1.6"	5.1"x1.6"	8.7"	9.6"	209	2A
MME 17 0800/0200	3740	31.5"	39.4"	1.6"	5.1"x1.6"	8.7"	9.6"	209	2A
MME 17 1000/0200	3740	39.4"	47.2"	1.6"	5.1"x1.6"	11.6"	12.4"	242	2A
MME 17 1200/0800	3740	47.2"	78.7"	1.6"	5.1"x1.6"	15.0"	19.7"	266	2A
MME 20 0800/0400	4400	31.5"	47.2"	1.8"	5.2"x2.3"	9.3"	11.6"	251	2A
MME 20 0800/0200	4400	31.5"	39.4"	1.8"	5.2"x2.3"	9.3"	11.6"	251	2A
MME 20 1000/0200	4400	39.4"	47.2"	1.8"	5.2"x2.3"	12.4"	16.3"	288	2A
MME 20 1200/0800	4400	47.2"	78.7"	1.8"	5.2"x2.3"	15.9"	21.5"	330	2A
MME 20 1400/1000	4400	55.1"	94.5"	1.8"	5.2"x2.3"	19.1"	25.2"	354	2A
MME 24 0800/0200	5280	31.5"	39.4"	1.8"	5.2"x1.8"	8.7"	10.8"	229	2A
MME 24 0800/0400	5280	31.5"	47.2"	1.8"	5.2"x1.8"	8.7"	10.8"	229	2A
MME 24 1000/0200	5280	39.4"	47.2"	1.8"	5.2"x1.8"	11.8"	12.8"	266	2A
MME 24 1200/0800	5280	47.2"	78.7"	1.8"	5.2"x1.8"	15.2"	20.3"	297	2A
MME 30 0800/0200	6600	31.5"	39.4"	1.8"	5.2"x2.3"	8.7"	10.8"	268	3A
MME 30 0800/0400	6600	31.5"	47.2"	1.8"	5.2"x2.3"	8.7"	10.8"	268	3A
MME 30 1000/0200	6600	39.4"	47.2"	1.8"	5.2"x2.3"	11.8"	12.8"	317	3A
MME 30 1200/0800	6600	47.2"	78.7"	1.8"	5.2"x2.3"	15.4"	20.3"	348	3A
MME 30 1400/1000	6600	55.1"	94.5"	1.8"	5.2"x2.3"	18.5"	25.4"	387	3A
MME 35 0800/0200	7700	31.5"	39.4"	2.0"	5.2"x2.5"	9.1"	11.8"	308	3A
MME 35 0800/0400	7700	31.5"	47.2"	2.0"	5.2"x2.5"	9.1"	11.8"	308	3A
MME 35 1000/0200	7700	39.4"	47.2"	2.0"	5.2"x2.5"	12.6"	15.4"	352	3A
MME 35 1200/0800	7700	47.2"	78.7"	2.0"	5.2"x2.5"	15.7"	21.7"	403	3A
MME 35 1400/1000	7700	55.1"	94.5"	2.0"	5.2"x2.5"	19.1"	26.8"	451	3A